


HCFC stored pressure fire extinguishers

Portable

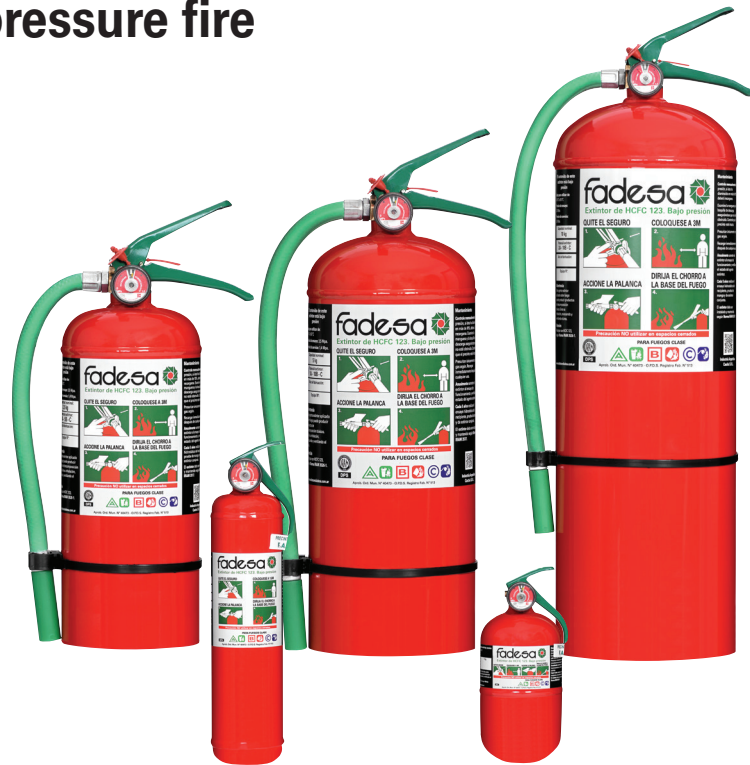

- Steel cylinders welded with MIG system (Metal Inert Gas).
- 100% Hydrostatically tested.
- Unique surface treatment, highly resistant to corrosion: mechanical pickled, phosphatized, passivated and painted with polyester powder paint.
- Forged brass valve with pressure gauge.
- Synthetic rubber hose of great maneuverability.
- Pressurized with Argon gas.
- Easy to use compact equipment. Simple maintenance.
- Clean extinguishing agent. Doesn't leave residues after use. Ideal for electronic equipments, data centers, museums, surgery rooms, etc.

Tech Specs					
	1 kg Ø3	1 kg Ø4	2,5 kg	5 kg	10 kg
Nominal capacity (kg)	1,90	1,70	4,60	8,50	16,50
Loaded weight (kg)	340	250	415	480	655
Height (mm)	92	110	220	225	230
Width (mm)	76	101	125	153	182
Discharge time (s)	3	3	4	5	6
Discharge range (m)	8	8	10	10	18
Temperature range (°C)	-20 to 50	-20 to 50	-20 to 50	-20 to 50	-20 to 50
Service pressure (Mpa)	0,8	0,8	0,8	0,8	0,8
Tested pressure (Mpa)	2,0	2,0	2,0	2,0	2,0
Extinguishing agent IRAM std.#	3526-1	3526-1	3526-1	3526-1	3526-1
Fire extinguisher IRAM std.#	3504	3504	3504	3504	3504
Strap bracket	Yes	Yes	Optional	Optional	Optional
Wall bracket	No	No	Yes	Yes	Yes
Models					
Code	A138	A142	A139	A140	A141